


RIGID COUPLING

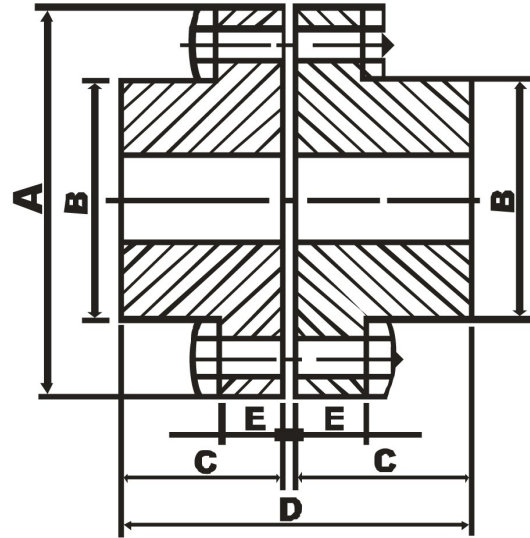

COUPLING SIZE	FINISH BORE		Ø A	Ø B	C	Ø D	E	Weight Kg.	MAX RPM
	Min.	Max.							
FRC 100	10	50	120	70	46.5	93	15	4	8000
FRC 101	20	60	170	85	57.5	115	17	11	6300
FRC 102	30	75	185	110	72.5	145	17	15	5000
FRC 103	40	90	220	130	87.5	175	20	26	4000
FRC 104	50	110	250	160	107.5	215	20	40	3350
FRC 105	60	130	290	185	115	230	25	62	2800
FRC 106	75	150	320	215	130	260	25	86	2800
FRC 107	90	170	350	240	145	290	25	110	2100
FRC 108	105	200	380	285	160	320	25	140	1900
FRC 109	125	220	430	315	170	340	25	200	1700
FRC 110	140	260	490	370	185	370	25	270	1400